

CEILING MOUNTING

- 1) Position the unit on the mounting surface so that the lens points toward the area you want to view.
- 2) Mark the position of the mounting holes and cable hole (see Figure 1).
- 3) Screw the provided 4X25-mm (black) screws halfway into the mounting surface.
- 4) Cut a hole in the mounting surface to accommodate the camera cables.
- 5) Attach the camera's video out BNC connector (see Figure 2) to the receiving device's video in BNC connector.
- 6) Attach the camera's power cable (see Figure 2) to your power source.
- 7) Feed the cables through the hole.
- 8) Place the mounting holes over the screws and turn the unit clockwise.
- 9) Tighten the mounting screws until snug.

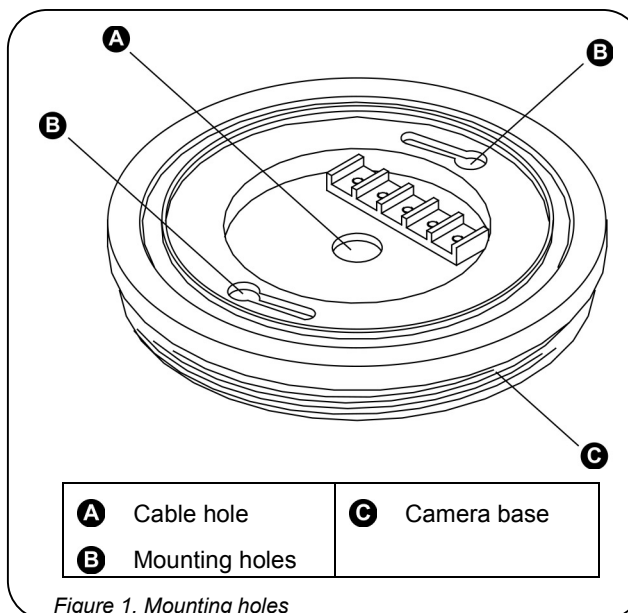


Figure 1. Mounting holes

ADJUSTMENTS

- 1) Loosen the zoom ring thumbscrew (see Figure 2).
- 2) Turn the zoom ring to set the desired zoom.
Note: The zoom range is from 3 to 8 mm.
- 3) Tighten the zoom ring thumbscrew.
- 4) Loosen the focus ring thumbscrew (see Figure 2).
- 5) Turn the focus ring to set the desired focus.
- 6) Tighten the focus ring thumbscrew.

Note: To keep the camera in focus, you might have to make adjustments to the focus ring as you tighten the thumbscrew.

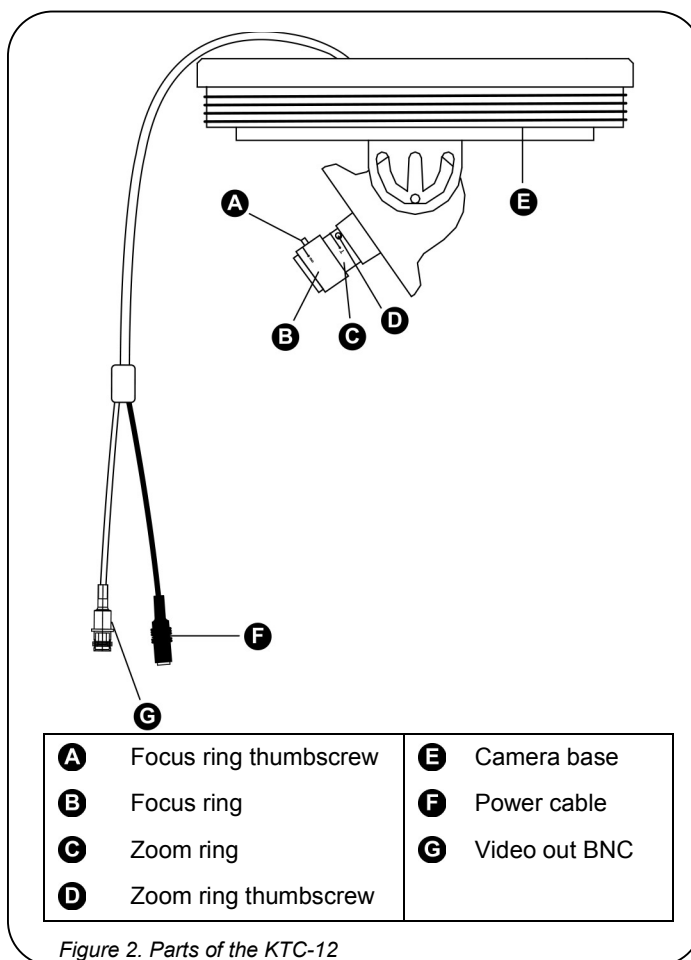



Figure 2. Parts of the KTC-12

WALL-MOUNT BRACKET

- 1) Place the wall-mount bracket against the mounting surface.
- 2) Mark the position of the mounting holes (see Figure 3).

Note: The bracket will lower approximately 0.5 in. (1 cm) when resting on the mounting screws.

- 3) Screw the provided 3.5X20-mm (silver) screws halfway into the mounting surface.
- 4) With a screwdriver, remove the top of the wall-mount bracket (see Figure 3).
- 5) On the underside of the wall-mount bracket, screw the two provided 3.5X10-mm (brass) screws halfway into the holes that correspond with your camera (see Figure 3).
- 6) From the underside of the wall-mount bracket, feed the camera cables through the cable hole (see Figure 3).
- 7) Place the mounting holes of the camera base over the screws in the wall-mount bracket.
- 8) Turn the camera base clockwise.
- 9) Tighten the screws until snug.
- 10) Run the camera cables through one of the rectangular openings in the back of the wall-mount bracket.
- 11) Replace the top of the wall-mount bracket, and secure it with the provided 3X8-mm (brass) screws.
- 12) Place the wall-mount bracket mounting holes over the screws in the mounting surface.
- 13) Lower the wall-mount bracket so that it rests on the mounting screws. 

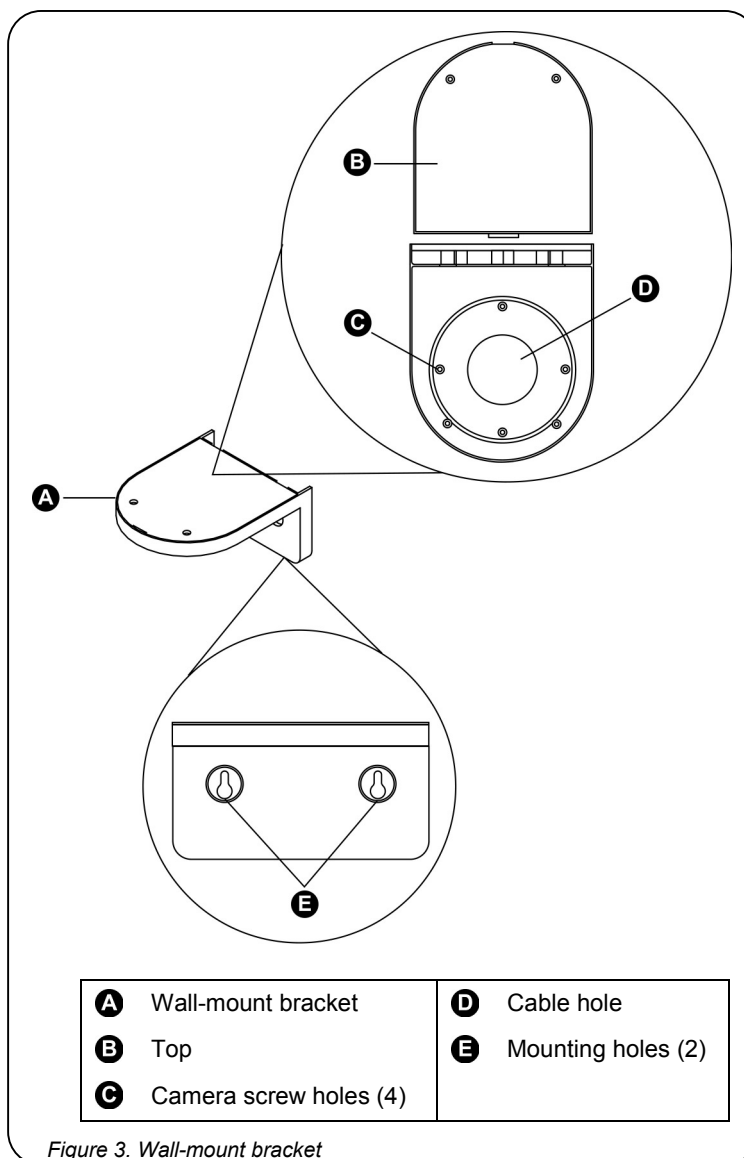


Figure 3. Wall-mount bracket

Warranty and Return Information**Three-year Warranty***

Kalatel warrants its products for a period of three years from the date of factory shipment. The warranty specifically covers any defects in material and workmanship, and does not cover equipment that has been abused, damaged, or modified.

Contact the factory for repairs, credit returns, advance replacements, and loaners.

*MobileView® and the monitor CRT carry a 12-month warranty.

Technical Support

Kalatel offers 24-hr technical support 7 days a week.

Call: 800-469-1676 (6 a.m. – 5 p.m. PST Mon. – Fri.)
541-740-3589 (all other times; limited support)

Fax: 541-752-9096 (available 24 hr a day)

An RMA number will be issued for returns. Call 800-469-1676
Monday through Friday between 6 a.m. and 5 p.m. PST.

KALATEL
an interlogi company