

1/3" B&W / Colour Vandal Dome Cameras



The NLCV and NLMV series incorporate a camera and lens package into a small vandal resistant dome style enclosure.

These cameras offer high quality images in an aesthetically pleasing enclosure. Both B&W and colour camera models are powered by 12VDC and offer excellent low light capabilities.

Available in a surface or semi-flush mount enclosure, all models are quick and easy to install in either indoor or outdoor applications. Enclosures are made of cast aluminum with a polyester powder coat finish and a tinted polycarbonate dome. Ideal for residential, commercial, schools, parking garages and other medium to high security facilities.

Features


- Fully integrated enclosure with camera and lens
- Tamper resistant, all aluminum construction with tinted dome
- Weather resistant aluminum housing
- 1/3" Interline Transfer CCD
- B&W models – 1/3" CCD 380 lines resolution .02 lux
- Colour models – 1/4" CCD 330 lines resolution 2.0 lux
- Electronic iris
- 12 VDC
- 3.6mm lens installed, 2.8mm & 8mm lens elements included
- 1 year warranty

NLMV4F
NLMV4S
NLCV4F
NLCV4S


1/3" B&W / Colour Vandal Dome Cameras

Technical Specifications

NLMV4F / NLCV4F

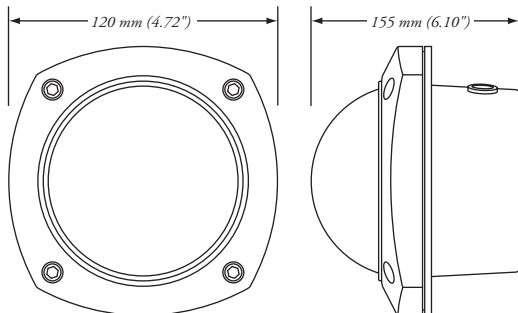

NLMV4S / NLCV4S

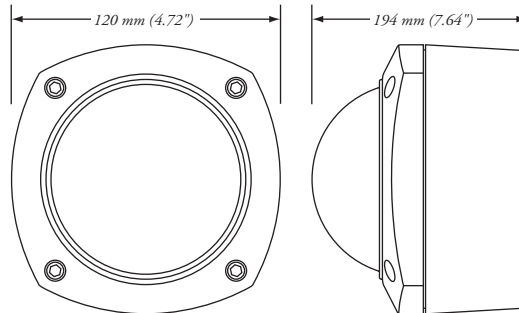

	NLMV4F	NLMV4S	NLCVF4	NLCV4S
IMAGE SENSOR	.1/3" CCD B&W	.1/3" CCD B&W	.1/4" CCD Colour	.1/4" CCD Colour
RESOLUTION	.380 TVL	.380 TVL	.330 TVL	.330 TVL
MINIMUM ILLUMINATION	.0.1 Lux	.0.1 Lux	.2 Lux	.2 Lux
ELECTRONIC IRIS	.1/60 to 1/100,000 sec			
VIDEO OUTPUT	.1.0 v p-p (75 ohms)			
LENS	.3.6mm f 2.0 installed			
OPTIONAL LENSES INCLUDED	.2.8mm and 8mm lens element			
CONNECTOR	.BNC Female	.BNC Female	.BNC Female	.BNC Female
OPERATING TEMPERATURE	.-20 to 50 C (-4 to 122 F)			
AMBIENT HUMIDITY	.10-96% non-condensing			
POWER CONNECTOR	.Barrel Type, Male			
CONSTRUCTION	.Outdoor Weather / Vandal Resistant Aluminum			
MOUNTING STYLE	.Flush	.Surface	.Flush	.Surface
POWER CONSUMPTION (MAX)	.140mA	.140mA	.180mA	.180mA
POWER REQUIREMENTS	.12 VDC	.12 VDC	.12 VDC	.12 VDC

Related Components

B&W Dome:

- High Performance Monitors
- M9109" B&W
- M121012" B&W
- M141014" B&W
- M171017" B&W
- M201020" B&W

Switchers and Quads

- NLS4LA4 camera sequential switcher
- NLMQ4A4 camera B&W real-time quad

Colour Dome:

- High Performance Monitors
- NL2099" colour
- NL214C14" colour
- NL22121" colour
- NE-LCD1515" LCD
- NE-LCD1717" LCD
- NE-LCD2020" LCD

Switchers

- NLS4LA4 camera sequential switcher

Ask About Our Complete Line of CCTV Products



www.nationalcctv.ca

Distributed by:

All specifications subject to change without notice. Information furnished is believed to be accurate and reliable. However, no responsibility or liability is assumed by its use, nor for any infringement of patents or other rights of third parties which may