



SENTROL

1032 Series Miniature Surface Mount with Flange Mount and
Wire Leads Magnetic Contacts

Gap distance	Closed loop	SPDT
Up to 5/8"	1032	1034
Up to 1"	1032W	

Color	White	Mahogany brown	Grey
Quantity	10		



1032-N



0 46188 01127 8

100% TESTED



1032 Series Miniature Surface Mount with Flange Mount and Wire Leads Magnetic Contacts


Installation Instructions

1032, 1032W, 1034

Determine the positions of contact and magnet. On wide gap contacts (1034W) align labels on contact and magnet so labels read in the same direction (switches are polarity sensitive). Attach contact and magnet with #4 screws.

Lead Colors:

Black: Common
 White: Closed Loop (N.O.)
 Red: Open Loop (N.C.)

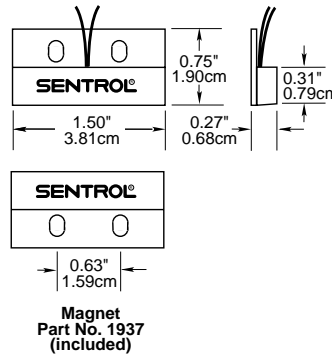

UL Specifications

**European Union Specification: 48 VAC/DC Max., 0.5 Amp

Part Number	Loop Type	Electrical Configuration	Gap Distance*
1032	Closed	N/O	5/8"
1032W	Closed	N/O	1"
1034	Open or Closed	SPDT	5/8"

****FORM A (1032, 1032W)**
 Voltage: 100 VAC/DC Max
 Current: 0.5 A Max
 Power: 7.5 W Max

FORM C (1034)
 Voltage: 30 VAC/DC Max
 Current: 0.25 A Max
 Power: 3.0 W Max

*Gap Specifications are nominal and may vary $\pm 20\%$. Gap Specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.

ULC Specifications

All Contacts: 30 VDC, 50 ma max.

Gap Specifications:*

See UL Gap Specifications



PH 503.692.4052

USA & Canada: 800.547.2556

Technical Service: 800.648.7424 FaxBack: 800.483.2495

www.sentrol.com www.interlogixsecurity.com

©2001 Interlogix, Inc.

Interlogix, Caddx, ESL, ITI and Sentrol are trademarks of Interlogix, Inc.

PK-0986 Rev G 10/01