

MONITOR ISM™ 2 Zone Suite Security Module

- Fully Self-Contained Alarm Panel
- 2 Inputs / Zones
- Built-In Door Chime
- Up to 8 Individual Users

The **2 Zone Suite Security** Module provides security for a wide array of applications, from a simple strip plaza to a multi-tower residential apartment and is a key component in the MONITOR ISM™ Suite Security solution.

Each Module is a fully self-contained alarm panel, which connects to the base building MONITOR ISM™ system for configuration and reporting. This integration allows for one single platform to provide a complete solution encompassing the base building parking garage, front and rear entry doors, elevators, local offices and tenant suites. Staff and users need only be proficient with one system thereby greatly reducing training time and possible confusion, which is typical in a multi-platform system.

Inputs / Zones

The Module provides for up to two input points for such devices as door contacts, glass-break detectors, motion sensors, carbon monoxide detectors and many more. One auxiliary output is included to control local items such as a siren driver or lighting control.

Users

Up to eight users can be configured per suite and four authority levels provide maximum flexibility for the end user. A key feature of the Suite Security Module provides the user with the ability to change their unique PIN at any time. The Master user can change the authority levels and edit users as required right from the Suite Security keypad.



Simple Operation

The suite security market typically puts ease of use near the top of its requirements. This helps to eliminate false alarms and other similar problems. To disarm or silence the system you simply enter your PIN; no other key presses are required. Other keypad functions (such as turning a light on or enabling the door chime) are accessed via function keys on the keypad. All status indicators are represented pictorially to provide an interface that is language independent.

Convenience Features

Many system convenience features are provided such as a configurable door chime to sound when a door or window has been opened and self-diagnostic features (such as local walk test) to ensure the system is functioning correctly.

Safety features include a single panic button, which can be configured to suit the application; typically this would be Fire or Police. This panic would then signal the base building system that a problem has occurred within this suite. The base building system monitoring staff would then report the incident to a central monitoring station.

Specifications

2 Zone Suite Security Module

Inputs:

- 2 fully programmable

Outputs:

- 1 Low Current Open Collector

Point Types:

- 16 pre-defined
- 20 custom

Supervision:

- Normally Closed
- Normally Open with End-of-Line

System Architecture:

RS485 communications from Module to MONITOR ISM™ main panel. Each Module contains a unique electronic serial number to ease installation and troubleshooting.

Power and Recommended Cable Requirements:

- 12 volts DC, 115 ma per Module (Cannot be powered direct from Module bus).
- 4 Conductor Shielded (Recommended) Twisted Pair (18 – 22 awg, depending on amount length of cable run).

Enclosure and Mounting:


70mm wide, 127mm high, 22mm deep

(2.75" wide, 5" high, 0.875" deep)

Suitable for surface mounting on drywall or wood.

Material:

Molded Plastic, White.

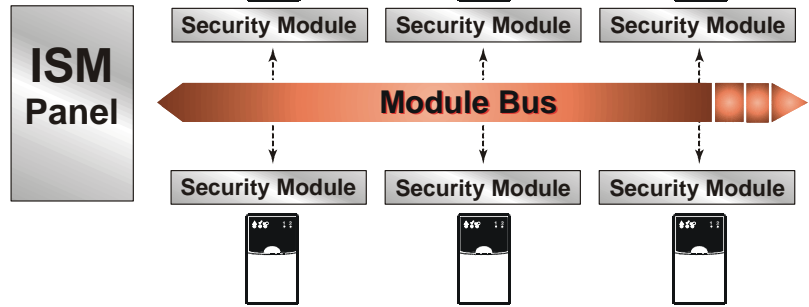

Compatibility

The 2 Zone Suite Security Module is compatible with MONITOR ISM™ Enterprise only.

Environmental

Temperature Range:

0°C to 50°C (32°F to 122°F)

Humidity Range:

10% to 90%

Warranty

MONITOR ISM™ 2 Zone Suite Security Modules are warranted against workmanship and material defects under normal use and operation for a period of one year. The warranty period commences from date of shipment.

Part Numbers

120-8144 2 Zone Suite Security Module

VEREX Technology, a division of CSG Security, is constantly working to improve products and reserves the right to alter equipment designs and specifications without notice or obligation.

© 2002 CSG Security Inc. / Sécurité CSG Inc.

5201 Explorer Drive, Mississauga, Ontario, L4W 4H1 Canada

Toll-free (USA & Canada): 1 877.249.9993
Phone: +1 905.206.8434
Fax: +1 905.629.4970

www.verextech.com sales@verextech.com

Rev. 1.5 July 12, 2002

Making security easier for you